

LIFESTYLES COLLECTION



LUXURY VINYL

Lifestyles Loc
Lifestyles 20
Lifestyles 12
Lifestyles 8
Lifestyles Lodge
Lifestyles Quarry Stone
Lifestyles Yukon
Lifestyles Stella
Lifestyles Bryant Park

Lifestyles Loc's strength & performance makes this beautiful floating floor suitable for commercial or residential applications. Using the Unilin Locking System as its foundation, Lifestyles Loc can be installed over a greater area, while still maintaining its integrity. Lifestyles Loc's color assortment and variety of textured surfaces from wire brushed to hand scraped will definitely be a crowd pleaser at your next event.




Castile Smoke


lifestyles loc




aragon walnut

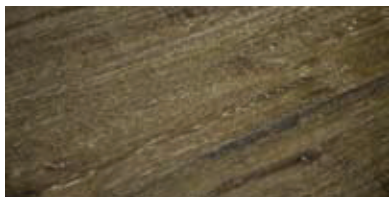

castile smoke

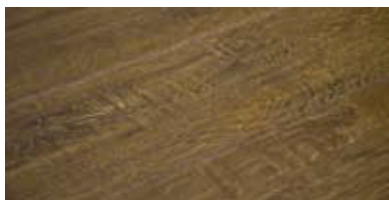

castile terra

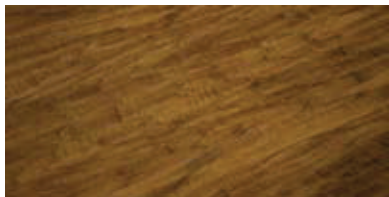


cordoba hickory




iberian oak




leon pecan

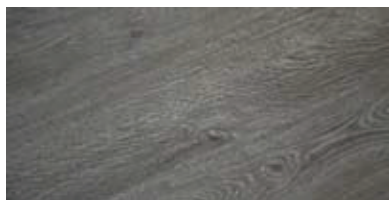


navarra oak

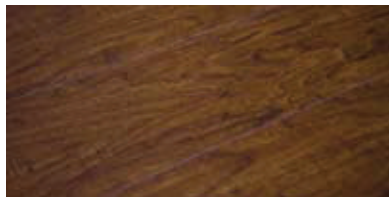

olvera hickory

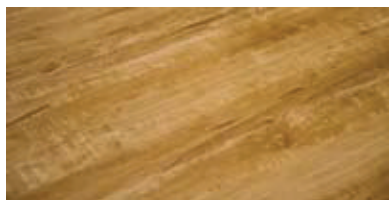

pamplona maple

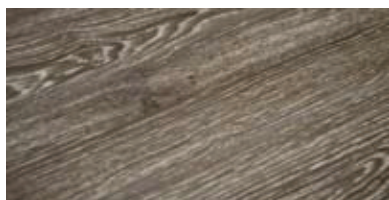

toledo oak

Length:	7" x 48" x 4mm
Wear Layer:	20mil (.5mm)
	Surface Guardian Pro
Square Ft./Box:	32.5
Weight/Box:	50 lbs.
Planks/Box:	14
Usage:	Residential, Commercial
Edge Detail:	Beveled Edge
Warranty:	10 year commercial finish
	20 year commercial structural




Pamplona Maple

Lifestyles 20 Luxury Vinyl Flooring brings a new level of durability to the vinyl flooring market of today. With its thick wear layer and superior Surface Guardian Pro finish, Lifestyles 20 is the right choice to inspire any of your commercial, residential or health care projects. The styling brings with it a wealth of color & textures to suit any decor.



lifestyles 20

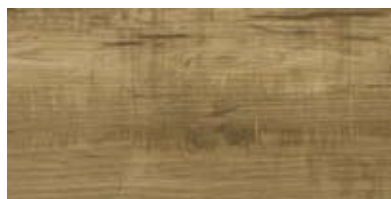


barcelona spruce



caceres acacia




cadiz oak

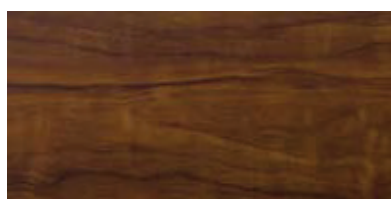


granada walnut



madrid maple

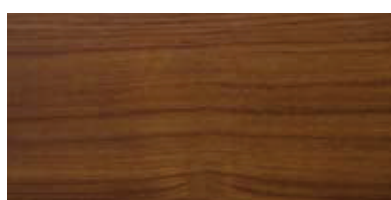

malaga mahogany

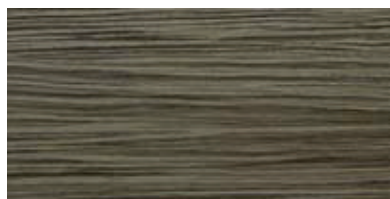

tortosa sisal



pyrenees pine




salamanca wenge



san sebastian strand bamboo



seville oak

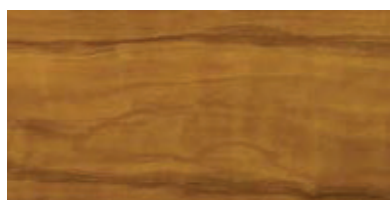

valencia teak

Length:	6" x 48" x 3mm
Wear Layer:	20mil (5mm) Surface Guardian Pro w/Nano Control
Square Ft./Box:	24
Weight/Box:	28.66 lbs.
Planks/Box:	12
Usage:	Residential, Commercial
Edge Detail:	Beveled Edge
Warranty:	10 year commercial finish 20 year commercial structural



Barcelona Spruce

Lifestyles 12 Luxury Vinyl flooring replicates real hardwood floors from exotic to domestic species at a tremendous value. Not only is Lifestyles 12 beautiful, durable, easy to maintain & water resistant, its look & style outmatches its closest competitor in the luxury vinyl market today!



Smoky Mountain Pine

lifestyles 12



allegheny oak



appalacian birch




blue ridge fir



cambridge walnut



cumberland cedar

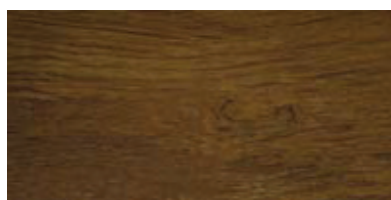


lexington pecan



plymouth maple



portsmouth oak

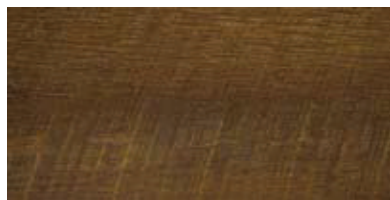

shenandoah oak



smoky mountain pine



springfield birch



wellesley oak

Length:	6" x 36" x 2mm
Wear Layer:	12mil (3mm)
	Surface Guardian Basic
Square Ft./Box:	35.94
Weight/Box:	28.63 lbs.
Planks/Box:	24
Usage:	Residential, Light Commercial
Edge Detail:	Square Edge
Warranty:	5 year commercial finish 10 year commercial structural



Appalacian Birch

Lifestyles 8 Luxury Vinyl flooring is a combination of Lifestyles 20 and Lifestyles 12 realistic hardwood offering in a 8 mil wear layer. From exotic to domestic species at a tremendous value. Not only is Lifestyles 8 beautiful, durable, easy to maintain & water resistant, its look & style outmatches its closest competitor in the luxury vinyl market today!



lifestyles 8 (special order)


Length:	6" x 36" x 2mm	Planks/Box:	24
Wear Layer:	8mil (.2mm)	Usage:	Residential
	UV Coated Ceramic	Edge Detail:	Square Edge
Square Ft./Box:	35.94	Warranty:	10 year residential finish
Weight/Box:	28.63 lbs.		Lifetime residential structural



barcelona spruce



tortosa sisal

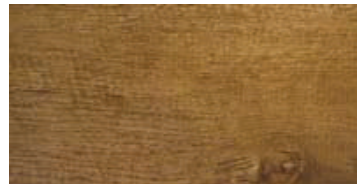

allegheny oak



plymouth maple



caceres acacia



pyrenees pine



appalacian birch



portsmouth oak



cadiz oak




salamanca wenge



blue ridge fir



shenandoah oak

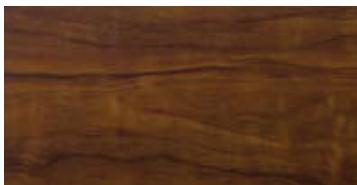

granada walnut



san sebastian strand bamboo



cambridge walnut



smoky mountain pine



madrid maple




seville oak




cumberland cedar




springfield birch

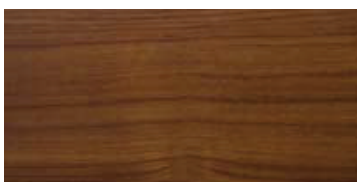


malaga mahogany

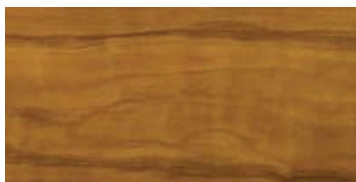

valencia teak

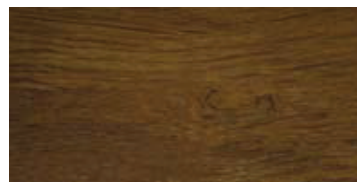

lexington pecan

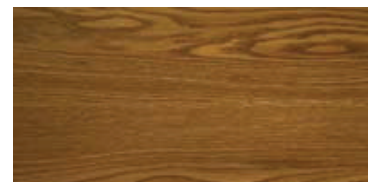

wellesley oak

Lifestyles Lodge Luxury Vinyl flooring offers a tasteful spectrum of hardwood visuals ranging from domestic to exotic. Boasting a generous 6" x 48" format, and realistic embossed wood grain textures, Castle & Cottage far outclasses any of the competition in this particular price category.




Chatham Walnut

lifestyles lodge



arcadian oak

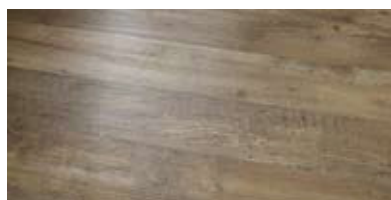

chaminade oak



chatham walnut



cupari acacia



jari oak



morello cherry



ponderosa pine



provincial oak



pumilla elm



rubra elm



sakonnet oak



senegalia acacia

Length:	6" x 48" x 2mm
Wear Layer:	12mil (3mm)
	Surface Guardian Basic
Surface Texture:	Wood grain embossing
Square Ft./Box:	35.94
Weight/Box:	27.21 lbs.
Planks/Box:	18
Usage:	Residential, Light Commercial
Edge Detail:	Square Edge
Warranty:	7 year commercial finish 25 year residential finish 10 year commercial structural Lifetime residential structural




Ponderosa Pine

Lifestyles Quarry Stone Luxury Vinyl utilizes high definition films, stone-specific textures, and groutable joint lines to provide a visual so realistic, you have to touch it to realize that it is luxury vinyl. These fashion forward colors and visuals can even be mixed and matched with our 3mm planks to create a truly custom floor.



Ardesia Caldera

lifestyles quarry stone

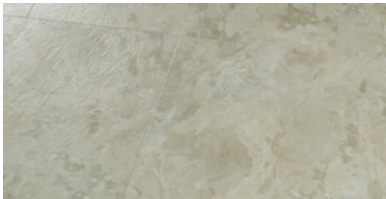

ardesia amaro




ardesia caldera




ardesia dolcetto



ardesia marrone

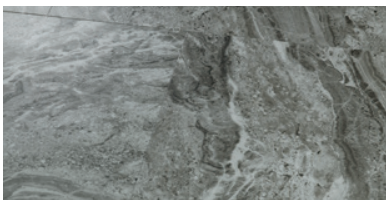


carrara gris

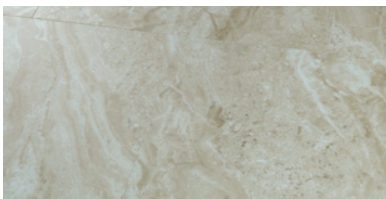

carrara lunaria




carrara mandoria

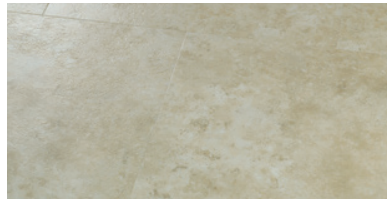


pietra avorio




pietra biscotti

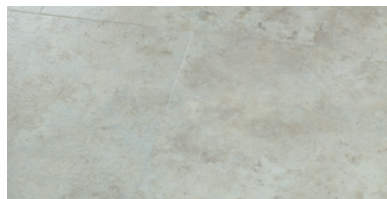

pietra crema

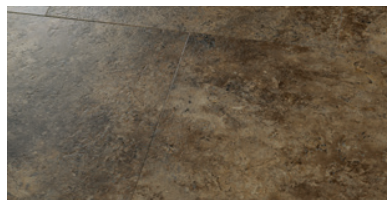

pietra noce

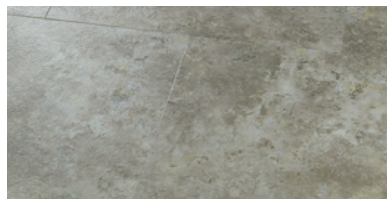

pietra novanna

Length:	18" x 18" x 3mm
Wear Layer:	20mil (5mm)
	Surface Guardian Basic
Surface Texture:	Stone texture embossing
Square Ft./Box:	35.94
Weight/Box:	38.92 lbs.
Planks/Box:	16
Usage:	Residential, Commercial
Edge Detail:	Microbevel
Warranty:	10 year commercial finish Lifetime residential finish 20 year commercial structural Lifetime residential structural



Ardesia Dolcetto


Lifestyles Quarry Stone Luxury Vinyl utilizes high definition films, stone-specific textures, and groutable joint lines to provide a visual so realistic, you have to touch it to realize that it is luxury vinyl. These fashion forward colors and visuals can even be mixed and matched with our 3mm planks to create a truly custom floor.




lifestyles stella




drake hickory

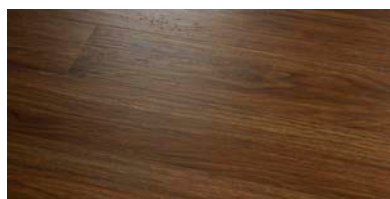

endeavor hickory

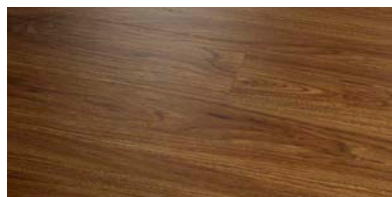


dias hickory

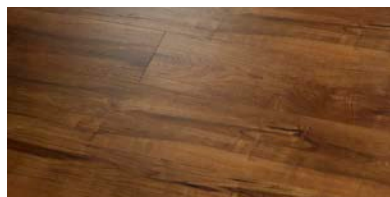

intrepid maple



argo walnut

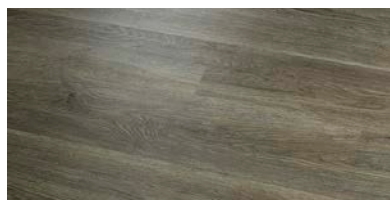


champlain oak



de gama oak



magellan oak

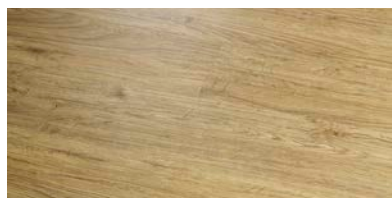

raleigh oak



erikson maple

Length:	5.75"x48"x5.5mm
Wear Layer:	12mil (.3mm)
	Surface Guardian Basic
Surface Texture:	Various
Square Ft./Box:	19.2
Weight/Box:	25.88 lbs.
Planks/Box:	10
Usage:	Residential, Commercial
Edge Detail:	Microbevel
Warranty:	Lifetime residential finish
	Lifetime residential structural
	10 year commercial structural
	5 year commercial finish



De Gama Oak

Lifestyles Yukon Luxury Vinyl flooring offers expansive visuals with its generous 7¼" x 48" format. This collection is further distinguished by its lush Hickory and French Oak variations that are both fashion-forward and timeless. Furthermore, hand scraped and wire brush embossed textures provide this stunning collection with a lifelike, realistic allure.



St. Marks

lifestyles bryant park



5th avenue stone concrete




madison stone concrete



rockefeller duomo stone



broadway duomo stone

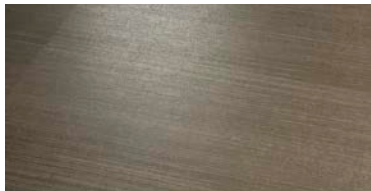

wall street lineal concrete




canal lineal concrete



central park wood end grain



st marks wood end grain

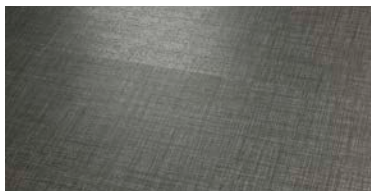

grand central fabric



delaney fabric

Length:

6" x 48" x 3mm - Plank (Duomo Stone & Wood End Plank)
18" x 36" x 3mm - Tile (Stone/Concrete, Lineal Concrete, & Fabric)

Wear layer:

20mil (.5mm)

Square Ft./Box:

36 Plank (Duomo Stone & Wood End)
36 Tile (Stone/Concrete, Lineal Concrete, & Fabric)

Weight/Box:

37.16 Plank (Duomo Stone & Wood End)
38.13 Tile (Stone/Concrete, Lineal Concrete, & Fabric)

Pieces/Box:

18 Planks (Duomo Stone & Wood End)
8 Tiles (Stone/Concrete, Lineal Concrete, & Fabric)

Usage:

Residential, Commercial

Edge Detail:

Beveled Edge (Duomo Stone & Wood End Plank)
Square Edge (Stone/Concrete, Lineal Concrete, & Fabric)

Warranty:

Lifetime Residential Finish
Lifetime Residential Structural
10 Year Commercial Finish
20 Year Commercial Structural



Grand Central

Lifestyles Yukon Luxury Vinyl flooring offers expansive visuals with its generous 7¼" x 48" format. This collection is further distinguished by its lush Hickory and French Oak variations that are both fashion-forward and timeless. Furthermore, hand scraped and wire brush embossed textures provide this stunning collection with a lifelike, realistic allure.



Oceanside French Oak

lifestyles yukon



bridle hickory



la palma french oak



montecito french oak



newport beach french oak



oceanside french oak



pelham hickory



piedmont french oak



rawhide hickory



redondo french oak



riata hickory



solana french oak



terret hickory

Length:	7 ¹ / ₄ " x 48" x 3mm
Wear Layer:	20mil (5mm)
	Surface Guardian Basic
Surface Texture:	Hand scraped or wire brush
Square Ft./Box:	38.65
Weight/Box:	41.8 lbs.
Planks/Box:	16
Usage:	Residential, Commercial
Edge Detail:	Micro Bevel Edge
Warranty:	10 year commercial finish
	25 year residential finish
	20 year commercial structural
	Lifetime residential structural



Redondo French Oak

trinity surfaces healthy spaces



■ ■ Lifestyles Loc

Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Peel Resistance	Pass	EN 431
Shear Resistance	Pass	EN 532
Color Fastness to Light	Pass	EN 649
Dimensional Stability	Pass	EN 434
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected	EN 7171-1
ISO 14001 Certified Environmental Management System		

Certified FloorScore: Independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED EQ Credit 4.3

■ ■ Lifestyles 20

Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Peel Resistance	Pass	EN 431
Shear Resistance	Pass	EN 532
Color Fastness to Light	Pass	EN 649
Dimensional Stability	Pass	EN 434
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected	EN 7171-1
ISO 14001 Certified Environmental Management System		

Certified FloorScore: Independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED EQ Credit 4.3

LEED: 25% Post Consumer Recycled Content. 25% recycled content contributing to MR credit 4. (Lifestyles 20)



Lifestyles 12

Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Peel Resistance	Pass	EN 431
Shear Resistance	Pass	EN 532
Color Fastness to Light	Pass	EN 649
Dimensional Stability	Pass	EN 434
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected	EN 7171-1
ISO 14001 Certified Environmental Management System		

Certified FloorScore: Independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED EQ Credit 4.3

LEED: 25% Post Consumer Recycled Content. 25% recycled content contributing to MR credit 4. (Lifestyles 20)

Lifestyles 8

Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Peel Resistance	Pass	EN 431
Shear Resistance	Pass	EN 532
Color Fastness to Light	Pass	EN 649
Dimensional Stability	Pass	EN 434
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected	EN 7171-1
ISO 14001 Certified Environmental Management System		

Certified FloorScore: Independent 3rd Party IAQ verification system for low emitting flooring. Approved as CHPS 01350 compliant and recognized in LEED EQ Credit 4.3

LEED: 25% Post Consumer Recycled Content. 25% recycled content contributing to MR credit 4. (Lifestyles 20)

Lifestyles Lodge

Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	DIN 51130 / ASTM D2047-04
Smoke Density	Pass	ASTM E662-09
Short Term Indentation	Pass	ASTM F1914-98
Static Load	Pass	EN 433 / ASTM F970-07
Stain Resistance	Pass	ASTM F925
Peel Resistance	Pass	EN 431
Shear Resistance	Pass	EN 532
Color Fastness to Light	Pass	EN 649
Dimensional Stability	Pass	EN 434
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected - E1 Rating*	EN 7171-1

*E1 Standard not to exceed 0.124 mg/m³ air
Method Detection Limit 0.080 mg/m³ air

Lifestyles Quarry Stone

Flexibility	Pass	ASTM F137
Thickness Standard	Pass	ASTM F386
Resistance to		
Chemicals (5 min.)	Pass	ASTM F925 5
Resistance to		
Chemicals (24 hr.)	Pass	ASTM F925
Heat Stability		
by Color Change	Pass	ASTM F1514
Light Stability		
by Color Change	Pass	ASTM F1515
Dimensional Stability		
after exposure to heat	Pass	ASTM F219
Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected *E1 Rating	EN 7171-1
Impact Insulation Class IIC	Eternity Underlayment IIC 71	ASTM E-492, E-989
	Delta 21	

Lifestyles Bryant Park

Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Smoke Density	Pass	ASTM E662-09
Short Term Indentation	Pass	ASTM F1914-98
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Resistance to Chemicals (5 min.)	Pass	ASTM F925 5
Resistance to Chemicals (24 hrs.)	Pass	ASTM F925
Dimensional Stability after exposure to heat	Pass	ASTM F219
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected - E1 Rating*	EN 7171-1

*E1 Standard not to exceed 0.124 mg/m³ air

Method Detection Limit 0.080 mg/m³ air

Lifestyles Stella

Flexibility	Pass	ASTM F137
Thickness Standard	Pass	ASTM F386
Resistance to Chemicals (5 min.)	Pass	ASTM F925 5
Resistance to Chemicals (24 hr.)	Pass	ASTM F925
Heat Stability by Color Change	Pass	ASTM F1514
Light Stability by Color Change	Pass	ASTM F1515
Dimensional Stability after exposure to heat	Pass	ASTM F219
Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected *E1 Rating	EN 7171-1
Impact Insulation Class IIC	Eternity Underlayment IIC 71 Delta 21	ASTM E-492, E-989

Lifestyles Yukon

Flexibility	Pass	ASTM F137
Thickness Standard	Pass	ASTM F386
Resistance to		
Chemicals (5 min.)	Pass	ASTM F925 5
Resistance to		
Chemicals (24 hr.)	Pass	ASTM F925
Heat Stability		
by Color Change	Pass	ASTM F1514
Light Stability		
by Color Change	Pass	ASTM F1515
Dimensional Stability		
after exposure to heat	Pass	ASTM F219
Fire Resistance	Class C - Pass	ASTM E 648
Coefficient of Friction	Pass	ASTM D2047-04
Static Load	Pass	ASTM F970-07
Stain Resistance	Pass	ASTM F925
Short Term Indentation	Pass	ASTM F1914-98
Smoke Density	Pass	ASTM E662-09
Wear Resistance	High	ASTM F510-93
Formaldehyde Emission (air)	None Detected *E1 Rating	EN 7171-1
Impact Insulation Class IIC	Eternity Underlayment IIC 71	ASTM E-492, E-989
	Delta 21	

ISO 14001 Certified Environmental Management System

simply better



P: Premium Fashion - Classic to Contemporary
L: Lifetime Warranty - Limited Lifetime Finish & Structure
U: Ultimate Value - Comprehensive color selection & textures at a competitive price
S: Superior Wear - Surface Guardian Basic and Plus with Nanocontrol



EZ Loc “Simply Stronger”: Unilin’s locking system is the strongest and tightest lock in the industry. It allows for a 40’ x 40’ installation without any expansion space in the floor.



Nanocontrol “Simply Cleaner”: Proprietary technology to effectively kill microorganisms that come in contact with the surface of the floor. (Anti-Microbial®).



Surface Guardian Basic “Simply Durable”: 12 mil wear layer topped with a UV coating containing ceramic additives for superior durability. Rated for Light Commercial Use.

Surface Guardian Pro “Simply Resistant”: 20 mil wear layer topped with a UV coating containing ceramic additives & Micro Ti22 Nanocontrol to create our most durable finish. Rated for Full Commercial Use.



ATTENTION!: Exposure to direct sunlight and other heat sources may affect the performance of the floor.



Trinity Surfaces Luxury Vinyl's proprietary formula of raw materials includes only the highest quality Pure virgin vinyl. PurCore is strictly monitored for consistency & quality in production, thus producing one of the most dimensionally stable vinyl cores in the luxury vinyl industry.




Trinity Surfaces Luxury Vinyl's proprietary recipe of raw materials includes only the highest quality & Pure virgin vinyl with **25% post consumer single-source recycled material**. PurCore is strictly monitored for consistency & quality in production, thus producing one of the most dimensionally stable vinyl cores in the luxury vinyl industry.




Floor Score Certified


- a) LEED EQ Credit 4.3 - low emitting material promoting healthy indoor air quality.
- b) MR Credit 4.3 - 25% Post Industrial Single-Source Recycled Content.

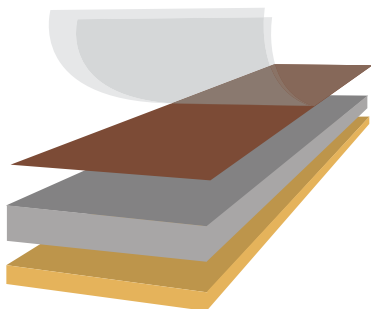

Trinity Surfaces's Luxury Vinyl is carefully crafted to bring you the highest quality product that performs. The top layer is a protective layer that helps resist scratches and scuffing while adding UV inhibitors that help with direct sunlight. The Protective Wear Layer adds additional durability and helps protect against tears and indentations. The 3rd layer is the printed visual that offers your realistic design pattern of wood, stone, slate or ceramic tile. Lastly, the bottom layer is for structural strength & durability while providing dimensional stability.

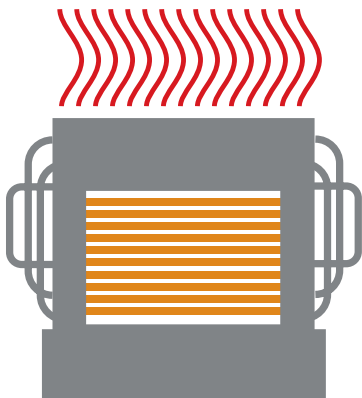

Approved for installation over radiant heat. Please see Trinity Surfaces Radiant Heat Guidelines found in the Installation Instructions for specific details.

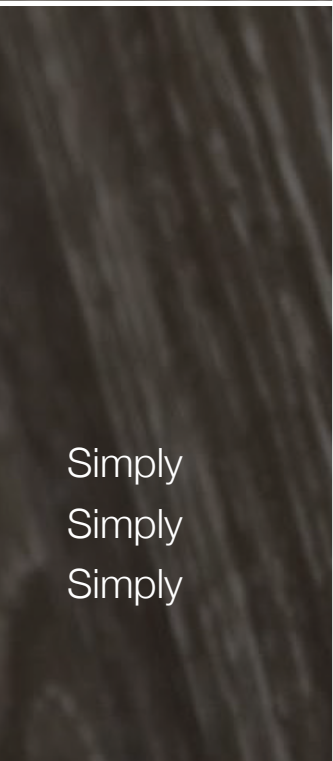

Simply
Simply
Simply



Visionary
Elegant
Better

warranty, care & maintenance

WARRANTY

Pre-Installation Warranty: Each Lifestyles Luxury Vinyl Plank is carefully inspected before leaving the factory shipped in sealed packaging to keep the product stable. We encourage inspection of the material prior to installation. It is imperative that the homeowner look at the material to determine whether the color and appearance of the floor are what they expected. Any planks or tiles that are defective should be set aside and they will be replaced free of charge. Vinyl planks have inherent character that cannot always be fully viewed in a display sample or hand set. Samples exposed to ultra violet light over time can also experience subtle changes.

Lifetime Structural Warranty: Lifestyles Luxury Vinyl warrants that the planks/tiles will remain free from manufacturing defects for as long as the original purchaser owns the home. In the unlikely event that any structural aspect of the plank/tile fails, Lifestyles Luxury Vinyl will repair, replace, or refund the original purchase price of your floor (our option). The factory warranties apply only to the original owner and are non-transferable.

Finish & Structural Warranties: Our UV Ceramic Surface Guardian Finishes are extremely durable and carry the following warranties:
Lifestyles 12 Plank 2mm: 5 year commercial finish/ 10 year commercial structural.
Lifestyles 20 Plank 3mm: 10 year commercial finish/ 20 year commercial structural.
Lifestyles Loc Plank 4mm: 10 year commercial finish/ 20 year commercial structural.
Lifestyle 8 Plank 2mm: 10 year residential finish/ Lifetime residential structural.

Radiant Heat Warranty: It is critical that the floor be installed to Lifestyles Hardwoods' specifications. The surface temperature of the floor should not exceed 85° F. Relative humidity should be maintained at a minimum of 35 to 40%. Hydronic, water-based radiant heat systems must be used (see installation instructions and radiant heat guide for greater detail). Use of electric mat systems is not authorized. Installation with radiant heat should be performed using the floating installation method.

EXCLUSIONS TO WARRANTIES

1. Color Variation: Although great care is taken in the production of our Luxury Vinyl Product environmental conditions can create small differences between production dates.

2. Ultraviolet Light/Sunlight Exposure: Subtle changes will occur (patina) when wood is exposed to UV rays from sunlight or florescent and incandescent bulbs. Window coverings, UV resistant tint, solar screens can minimize but not eliminate this natural occurrence.

3. Pre-Installation Inspection of Planks & Tiles: Planks and tiles containing manufacturing defects are eligible for replacement. Return unused planks & tiles for free replacement material. However, material that is subjectively viewed as defective but meets Lifestyles Luxury Vinyl's and industry standards for grade will not be replaced. Boards and tiles that are installed when visibly defective will not be eligible for replacement.

4. Adverse Environment: Damage created by moisture, sharp objects, sand, gravel, or other abrasive material, loss of sheen, scratches, high heels, dents caused by unprotected chair/furniture legs, and pet claw damage is excluded from this warranty.

5. Maintenance: Full compliance with maintenance instructions is required. Bona Kemi Stone, Tile & Laminate Cleaner must be used. Spills must be wiped up immediately.

6. High Traffic Areas: High traffic areas may experience finish wear through. More than 10% of the total surface area must be effected for the Residential & Commercial Finish Warranties to apply.

7. Internet Purchases: Lifestyles Luxury Vinyl does not warrant product purchased on the internet. Only product purchased from an authorized displaying dealer and serviced locally will be covered under warranty. Any claim must be accompanied by an original dealer invoice and original dealer inspection report. NOTE: See Lifestyles Luxury Vinyl website for full internet selling policy at www.Lifestylesfloors.com
This warranty is limited to residential use and does not apply to industrial or commercial use. When unauthorized maintenance products are used the warranty becomes void. If any product is abused, improperly installed (see installation instructions), or damaged by moisture intrusion, plumbing leaks, mold, building defects, floods, or circumstances beyond our control the warranty is no longer valid. Lifestyles Luxury Vinyl will not be responsible for any special, incidental, or consequential damages including inconvenience or loss of time.

This warranty applies to all Lifestyles Luxury Vinyl products purchased after January 1, 2012. It is valid for the original purchaser only and is non-transferable. No agent, dealer, fabricator, installer, or employee of Lifestyles Hardwoods Inc., is authorized to alter or increase the terms, limitations, or obligations of this warranty. In the unlikely event that warranty service is required, please contact your original Lifestyles Luxury Vinyl retailer to arrange an evaluation of the floor.

MAINTENANCE GUIDE

1. Regular Maintenance Dust Removal: Since Luxury Vinyl flooring has a hard, non-porous, finished surface, dust and household allergens can be easily removed. However, grit and dust left on the floor long term can be abrasive to the finish. Maintenance should include regular vacuuming with a canister vacuum and a soft brush attachment. The brush must be replaced periodically when the brush wears out.

NOTE: *Do not use treated commercial dust-mop or swifter-type products because they can contain petroleum-based solvents that can leave a chemical residue.*

2. Clean Up All Spills: Spills can be cleaned up with a moistened, well wrung out soft cloth or sponge. Once the spill is removed, spray Lifestyles Trueclean wood and lvt cleaner on clean, moist, towel to remove all remaining residue. All spills must be cleaned up immediately.

3. Regular Cleaning: Follow the instructions on the bottle of Lifestyles Trueclean. The cleaner can be sprayed on the head of the Trueclean System or directly to the floor in a fine mist. This mop system consists of a terry cloth boot that covers an applicator head. The terry boot must be moistened with water and well wrung out before applying the cleaner.

4. Scuff Removal: Use Trueclean wood and lvt cleaner and a red scotch bright pad to remove scuff from surface of plank or tile. Use light pressure on the pad with scuff moistened with the cleaner. Do not remove scuffs using dry pad.

5. Dent Prevention: While tougher than wood Vinyl flooring is still susceptible to dents and scratches. Cloth glides must be applied to chair and furniture legs. Double barrel coaster wheels should replace hard rubber or metal wheels. *High-heel shoes can damage a vinyl floor. It is important to keep the tips in good repair.*

6. High-Traffic Areas: To minimize scuffing and scratching, some additional precautions can be taken. Place area rugs in high-traffic areas. Place walk-off mats both outside and inside exterior doors. Place mats at the kitchen sink and, if you prefer, in front of the stove as well.

7. Solvent Based Cleaners: Do not use any solvent based cleaners; paint thinner, acetone, etc. on Luxury Vinyl floors.

NOTE: *Do not use rugs with rubber backs. The rubber does not breathe and can make your floor slippery or damage the finish. Vinyl mesh pads, which are designed to keep rugs from moving should be used. Do not lay jute-back or sisal-type rugs on the vinyl floor without protective backer on rugs to prevent damage to the finish.*

CHARACTERISTICS OF YOUR LIFESTYLES LUXURY VINYL FLOOR

Climate & Humidity Control: Although very stable proper climate control is still important to the performance of Luxury Vinyl. Vinyl flooring performs best at relative humidity rates between 30 and 50% and temperatures between 50 and 80F.

NOTE: *Leaving a building/structure unoccupied without climate control for extended periods of time can lead to damage to the floor from excessive humidity build-up or extremely dry conditions. Both scenarios can damage the floor, cabinets, and furniture.*

Ultraviolet Light & Color Changes in Floor: Lifestyles Luxury Vinyl is very color stable, however large amounts of unfiltered UV light can create color changes over time. Solar UV film and, in some areas where heavy sunlight is experienced, solar screens can minimize any changes in color.

Natural Visual Characteristics: Our luxury vinyl floors are created to showcase the natural beauty of wood, tile & stone. As such, the planks or tiles will contain natural appearing mineral deposits/streaking, and both closed and filled knots. Boards include an array of light and dark portions depending if the wood comes from the inner (heartwood) or outer (sapwood) section of the tree. The intent of our product is to mimic nature as closely as possible.

Style: At Lifestyles Luxury Vinyl we have the right style, species, texture, gloss level, board width and length and tile size to fit any décor. Please ask your dealer about our four product collections, Lifestyles 12, Lifestyles 20, Lifestyles Click and Hermosa Stone.

product safety & data sheet

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product Name:	Heterogeneous Floor Plank & Tile - LVT
Chemical Name:	Heterogeneous floor Plank & Tile
Product Use/Class:	Floor covering
Company Information:	Trinity Tile 115 S.W. 49th Ave. Ocala, FL 34474 Phone 866 774-3390
Effective Date:	January 1, 2012

SECTION 2 - COMPOSITION/INFORMATION ON INGREDIENTS

None per OSHA Standard 29 CFR 1910.1200 & SARA Title 111, Section 313

SECTION 3 - HAZARDS IDENTIFICATION EMERGENCY OVERVIEW

Form:	Solid vinyl flooring.
Color:	Varies
Odor:	No appreciable odor.

WARNING STATEMENTS

None

POTENTIAL HEALTH EFFECTS

Likely Routes

of Exposure:	Eye contact: Possible irritation
Skin contact:	Possible, mild irritation.
Inhalation:	Solid material. Be familiar with inhalation precautions for adhesives.
Ingestion:	Small amounts, if swallowed, are not expected to cause injury.
Chronic:	No known chronic effects
Other:	This product is a solid consumer good and is relatively non- toxic, presenting no known hazard to people except as noted under thermal decomposition by-products. Refer to Section 11 for toxicological information.

SECTION 4 - FIRST AID MEASURES

If in Eyes:	Flush with water, like any non-hazardous solid.
If on Skin:	If skin is irritated from handling product (transitory mechanical dermatitis), wash thoroughly with soap and water. Seek medical attention if condition persists.
If Inhaled:	None expected. Remove to fresh air and seek medical assistance if adverse reaction to adhesive occurs. If Swallowed: Seek medical assistance if a considerable amount is swallowed.

SECTION 5 - FIRE FIGHTING MEASURES

Flash Point:	Not available
Lower Explosive Limit (LEL) %:	Not available
Upper Explosive Limit (UEL) %:	Not available
Auto-Ignition	

Temperature:
OSHA Flammability Classification:
Hazardous Products of Combustion:

Not available

Not available

Protect self from melted product & combustion products.

Extinguishing Media:

Use foam, CO2, water spray, or dry chemical extinguishing agent, and as appropriate for surrounding fire.

Unusual Fire and

Explosion Hazards:

None

Fire Fighting Equipment:

Self-contained breathing apparatus and full protective clothing.

Fire Fighting Equipment:

Self-contained breathing apparatus and full protective clothing.

Miscellaneous Advice:

ASTM E-648 CRF value greater than 0.45 W/ Square CM. Material is considered to be self extinguishing.

See Section 10.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Personal precautions:

None. This is a non-hazardous material.

Methods for clean-up:

Due to solid, inert properties, scrap pieces may be simply swept up and disposed of as a solid non-hazardous waste per local, state and federal regulations.

Refer to Section 13 for disposal information.

Refer to sections 14 & 15 for reportable quantity information.

SECTION 7 - HANDLING AND STORAGE

Handling:

Install with adequate ventilation.

Wash thoroughly after handling and before eating, drinking and storage.

Storage:

Consult Hallmark Luxury Vinyl Installation Guide for additional information on handling and storage.

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

Engineering Controls:

Install in well ventilated areas.

Respiratory Protection:

Not normally required, unless adhesives or other installation chemicals so warrant.

Eye Protection:

Not normally required, unless adhesives or other installation chemicals so warrant.

Hand & Skin Protection:

Use of gloves is recommended since handling large quantities of tile may cause mechanical irritation around tips of fingers.

Other Protective Equipment: Not normally required, unless adhesives or other installation chemicals so warrant.

Hygienic Practices:

Wash hands before eating, smoking , or using toilet facilities. Do not smoke in any chemical handling or storage area. Food or beverages should not be consumed anywhere this product is handled or stored. Wash thoroughly after handling.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance:	Solid, vinyl flooring
Physical State:	Solid, vinyl flooring
Water Solubility:	Negligible
Specific Gravity:	1.4-2.0 (Water = 1.0)
Odor:	No appreciable odor.

SECTION 10 - STABILITY AND REACTIVITY

Conditions to avoid:	Stable
Materials to avoid:	Stable
Stability:	Stable
Hazardous reactions:	Will not occur.
Hazardous Polymerization:	Will not occur.
Hazardous Decomposition Products:	Thermal decomposition in the presence of air may yield carbon dioxide, carbon monoxide, and possible hydrochloric acid.

SECTION 11 - TOXICOLOGICAL INFORMATION

Product LD50 (Oral):	N/A
Product LD50 (Dermal):	N/A
Product LC50:	N/A
Immediate (Acute) Effects:	None known.
Delayed (Subchronic & Chronic) Effect	None known.

SECTION 12 - ECOLOGICAL INFORMATION

No ecological impact study information is available on this product.

SECTION 13 - DISPOSAL CONSIDERATIONS

US EPA RCRA Status:	N.A.
Disposal Considerations:	N.A.
Disposal Method:	N.A.
Miscellaneous:	Material is inert, disposed of in accordance with local, state and federal guidelines.

SECTION 14 - TRANSPORT INFORMATION

The information provided in this section is for information only. Please apply the appropriate regulations to properly classify your shipment for transport.

DOT Proper Shipping Name:	Not regulated
DOT Hazard Class:	Not regulated
DOT UN/NA Number:	Not regulated
Packing Group:	Not regulated
Emergency Response Guide Number:	Not regulated
Other:	Not regulated

SECTION 15 - REGULATORY INFORMATION

U.S. Federal Regulations:	Not available
SARA Section 313:	Not available
Toxic Substances Control Act	Not available
Inventory Status:	Not available
Export Notification:	Not available
Other:	Not available

SECTION 16 - OTHER INFORMATION

This material is a Finished Floor Covering product. Hallmark Luxury Vinyl provides a Product Safety Data Sheet for all finished floor covering products

Product Safety Data Sheet's (PSDS) are provided for finished floor covering products based on the "article exemption" found in 29 CFR 1910.1200 (b) (6) (v). An article is defined as: a manufactured item other than a fluid or particle: (i) which is formed to a specific shape or design during manufacture; (ii) which has an end use function(s) dependent in whole or in part upon its shape or design during end use; and (iii) which under normal conditions of use does not release more than very small quantities, e.g. minute or trace amounts of a hazardous chemical and does not pose a physical hazard or health risk to employees.

There is a wide variety of recommended work practices, installation techniques, and safe handling guidelines in Hallmark Luxury Vinyl Professional Installation Guide. Guides are also available through your Distributor or by calling 1-888 551-0888. Because most floor installations required adhesives, it is recommended that the user review the manufacturers recommendations for adhesive spread rate, open time, proper ventilation, safe installation practices, etc. during installation

Legend:

N.E.- Not Established

°F - Degrees Fahrenheit

N.A. - Not Available

°C - Degrees Centigrade

S - Skin

ppm - parts per million

C - Ceiling (Exposure Levels)

NIOSH - National Institute for Occupational Safety

PEL - Permissible Exposure Limits

ACGIH - American Conference of Government Industrial Hygienist

MSHA - Mine Safety and Health Adm.

TLV - Exposure limits developed by ACCIH

TSCA - Toxic Substances Control Act

TWA - Time Weighted Average

CIH - Certified Industrial Hygienist

STEL - Short-Term Exposure Limit NFPA - National Fire Protection Association

HAZCOM - Hazard Communication Standard (29CFR1910.1200)

OEL - Occupational Exposure Limit OSHA- Occupational Safety and Health Administration

CERCLA - Comprehensive Environmental Response, Comprehensive and Liability Act

DISCLAIMER

Although the information and recommendations set forth herein (hereinafter "Information") are presented in good faith and believed to be correct as of the date of hereof, the company makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will the company be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO

notes



115 S.W. 49th Avenue, Ocala, Florida 34474
866-774-3390
www.trinitysurfaces.com