



# DESIGNER BASE, WALL BASE, TREADS, & TRANSITIONS

---

ts trinity surfaces

















# **Color Program**

A 36 core color integrated color coordination system that encompasses the entire product line.

Please make final selection for all colors from actual product samples. To order samples go to [trinitysurfaces.com](http://trinitysurfaces.com) or call 866.774.3390.


# Core Colors



quick ship

								
midnight 701	cliffside grey 663	cinder 603	deep grey 217	granite 660	stormy 208	willow 523	desert twilight 050	stone grey 204
								
stone harbor 190	tapestry beige 030	sail cloth 112	constellation 674	flagstone 597	bluffs 527	grey owl 209	snowfall white 244	light khaki 403
								
sandpiper beige 519	abalone 503	buckhorn 033	java 504	saddle brown 502	desert 205	hemp 118	rose parade 966	marmalade 070
								
lemon shine 820	emerald 077	fir 055	yukon green 331	misted green 210	caribbean 120	deep ocean 115	mistral 875	serenata 672













































# Metallics

special order


icicle lux 117*

sierra lux 108

terracotta lux 123

alpine lux 106*

# Special Order Colors

									
pure white 401*	horizon 173	metropolis 198	frappe 103	platinum grey 628	oyster white 137	calm 168	hazy skies 113	silver satin 040	grey mist 110
									
sharkskin 192	natural wicker 508	simply white 170	sandy 150	driftwood 104	rocky brown 201	timid beige 203	desert tan 305	rich cream 206	light mocha 001
									
davenport tan 509	potters clay 512	rusty nail 060	spanish red 434	beach plum 607	sweet taffy 491	brick red 425	rouge 114	tang 080	toffee orange 479
									
sunset 090	coral 407	cinnamon 968	pence 100	sundial 545	forge brown 860	summer gold 101	lemonade 102	pear green 066	lime freeze 036
									
forrest dew 044	dry sage 246	mountain moss 283	eucalyptus 922	sage 242	citrus orange 088	harbour haze 254	fairy tail blue 711	marine blue 092	blue jean 099
									
seaport blue 505	tidal 506	provence blue 323	nickel 727	polo blue 130	bashful blue 520	coastline 920	summer blue 970	portland grey 810	violetta 965

\*available in designer base



# DESIGNER BASE

## SCULPTED WALL BASE



Designer Base is a flexible, thermoplastic rubber wall base that simulates painted, sculpted wood base moulding. It is more economical than traditional wood base and is ideal for remodel or new construction in commercial, institutional, or hospitality settings. It is dent and scratch resistant and requires no painting.

Designers flexibility makes it great for straight or curved walls while hiding imperfections. Continuous, seamless rolls are perfect for large areas. Pre-cut inside or outside corners can be ordered from the factory. Base also curves around 10" plus columns for a great architectural finish.

Designer Base is easily installed with acrylic cove base adhesive. No nailing, priming, painting, or heavy cleanup required.

Regal  
401 Pure White

AVAILABLE IN ALL CORE COLORS + 401 PURE WHITE, 106 ALPINE LUX, and 117 ICICLE LUX

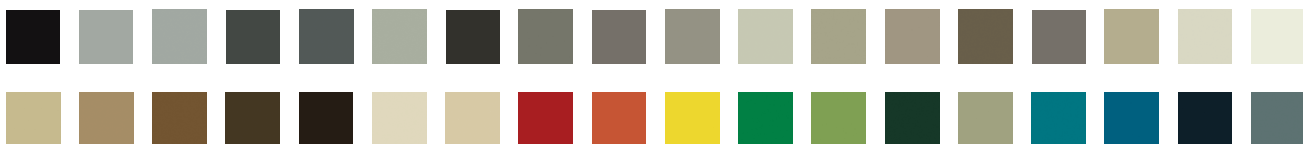


## CUSTOM COLORS AVAILABLE MINIMUMS APPLY

Please make final selection for all colors from actual product samples. To order sample go to [trinitysurfaces.com](http://trinitysurfaces.com) or call us at 866-774-3390.

2,000 LIN. FT. MINIMUM



**Proper 3"**



**Provencial 4.25"**



**Contempo 4"**



**Contempo 4.5"**



**Proper 4"**



**Traditional 3.25"**



**Stride 4"**



**Stride 4.5"**



**Grande 6"**



**Minimal 4"**



**Minimal 4.5"**



**Minimal 6"**



**Noble 4.25"**



**Noble 4.25"**



**Noble 6"**



**Ornament 4.25"**



**Oracle 4"**



**Oracle 4.25"**



**Elliptical 4.25"**



**Subtle 3"**



**Foray 5.25"**



**Clean 4"**



**Clean 4.25"**



**Quarter Round .5" Chair Rail 4" and Corner Guard**



# DESIGNER BASE

## TECHNICAL DATA

PROFILE	THICKNESS	HEIGHT	COIL LENGTH
Proper	.500"	3.00"	50'
Proper	.359"	4.25"	50'
Traditional	.375"	3.25"	36'
Grande	.1875"	6.00"	36'
Ornament	.375"	4.25"	50'
Elliptical	.375"	4.25"	50'
Foray	.375"	5.25"	25'
Provencial	.375"	4.25"	50'
Minimal	.313"	4.00"	36'
Minimal	.313"	4.50"	36'
Minimal	.313"	6.00"	36'
Oracle	.250"	4.00"	50'
Oracle	.250"	4.25"	50'
Noble	.250"	4.00"	50'
Noble	.250"	4.25"	36'
Noble	.250"	6.00"	36'
Subtle	.313"	3.00"	50'
Clean	.250"	4.00"	50'
Clean	.250"	4.25"	50'
Contempo	.313"	4.00"	36'
Contempo	.313"	4.50"	36'
Stride	.313"	4.00"	36'
Stride	.313"	4.50"	36'
645 Quarter Round	.500"	0.50"	12'
650 Chair Rail	.250"	4.00"	12'
696 Corner Guard	.375"	Complement Profiles	8' lengths



**Designer** also available in 8' & 4' lengths on request.

**Composition:** Thermoplastic Rubber

**Applicable Standards:** ASTM F-1861, Type TP, Group 1, Styles A, B & D

**Flame Resistance:** ASTM E-648 Clas

# COMMERCIAL WALL BASE

## THERMOPLASTIC RUBBER

### RUBBER WALL BASE TYPE TP

Formulated to resist scuffs or abrasions, Commercial Wall Base is a coextruded thermoplastic rubber that will not fade or crack and easily forms to curves and corners for a clean installation. Commercial Wall Base is available in 100 standard colors including the 36 Core Color colors that match the entire line of flooring products that includes Stair Treads, Mouldings and accessory products. A range of hues to complement any decor.

#### BENEFITS

- Heavy gauge rubber base
- Flexible formulation easily forms to curves and corners for clean installation
- Will not fade or crack
- Scuff and scratch resistant
- Available in 4' sticks and 100' seamless coils
- 100 standard colors including 36 Color System colors

## TECHNICAL DATA

TYPE & THICKNESS	HEIGHT	LENGTH	COLORS	CORNERS
1/8" Cove Base	2.5", 4", 4.5", 6"	4', 100' coils	100	OS
1/8" Toeless Base	2.5", 4", 6"	4', 100' coils	100	OS

Composition: Thermoplastic Rubber

Applicable Standards: ASTM F-1861, Type TP, Group 1, Styles A & B ASTM


E-648 Class 1

Inside Corners not available for Carpet (toeless) Base.



### WALL BASE CORNERSPre-formed

Inside and outside corners are manufactured to match all wall base sizes.

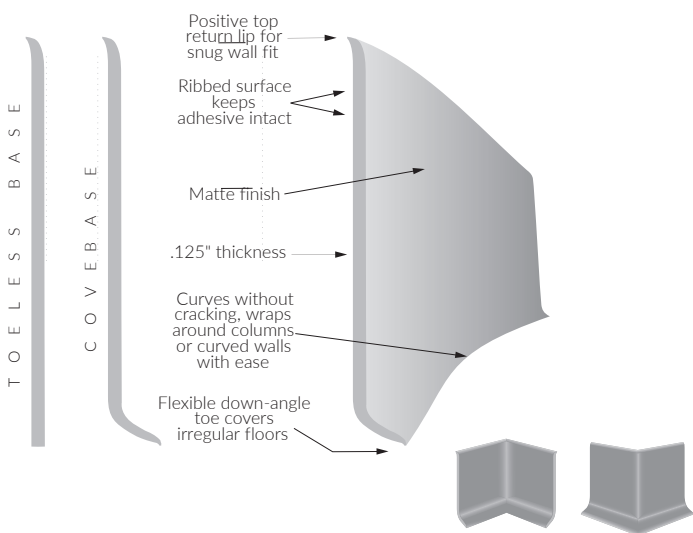

## VINYL

### VINYL WALL BASE TYPE TV

Our Vinyl Wall Base gives you years of lasting protection. It's available in the 100 standard wall base colors, including the Core Color of 36 colors, providing an economical way to match the entire line of flooring products, including Tile, Stair Treads, Mouldings, and accessory products. Vinyl Wall Base performs well around curved walls and corners to give your installation a perfect final touch. Vinyl Wall Base has a matte finish that coordinates nicely with a variety of patterns and textures in both flooring and carpet. When you're ready to specify vinyl base, remember the quality and vast product selection of Vinyl Wall Base.

#### BENEFITS

- Engineered for heavy traffic and high maintenance areas
- Scuff and abrasion resistant
- Tough matte finish helps hide substrate irregularities
- Available in .080" and .125" gauges

## TECHNICAL DATA

TYPE & THICKNESS	HEIGHT	LENGTH	COLORS	CORNERS
.080" Cove	2.5", 4", 6"	4', 100' coils	100	OS
Base .080" Toeless	2.5", 4", 6"	4', 100' coils	100	OS
Base 1/8" Cove Base	2.5", 4", 4.5", 6"	4', 100' coils	100	OS
1/8" Toeless Base	2.5", 4", 6"	4', 100' coils	100	OS

Composition: Thermoplastic Vinyl

Applicable Standards:

ASTM F-1861, Type TV, Group 1, Styles A & B

ASTM E-648 Class 1



### CUSTOM COLORS AVAILABLE

Minimums apply. Please make final selection for all colors from actual product samples. To order samples go to [trinitysurfaces.com](http://trinitysurfaces.com) or call us at 866-774-3390

# TREAD COLLECTION

## STAIR TREADS AND RUBBER STAIR NOSINGS

Tread Collection Stair Treads have a unique grooved surface for improved traction and aesthetics.

A variety of designs are available to meet ADA requirements as well as meeting a wide range of budgets.


12' Rubber and Vinyl Stair Treads are also available.



### TREAD COLLECTION TECHNICAL DATA

PRODUCT	LENGTHS
Ribbed Linear	3', 3 1/2', 4', 5', 6', 8',
Stair Tread,	12' (packaged 5 per carton)
Vinyl or Rubber	
ACCESSORIES	LENGTHS
.085 Stringers	10" x 50'
Risers (Cove)	7" x 50'


All of our flooring products conform with ADA Accessibility Guideline Requirements that floors be stable, firm, and slip-resistant.



### ADA FLEXIBLE NOSE FOR EASY COMPLIANCE

All Tread Collection Stair Treads have a notch behind the nose for increased flexibility. The ADA requires nosing angles to be between 60° and 90° from the horizontal. This product modification will allow the nosing position of these products to more easily conform to the steps' nosings that have been built to the severest angle allowed by the ADA (60°).


#### VINYL AND RUBBER ULTRA STEP TREAD

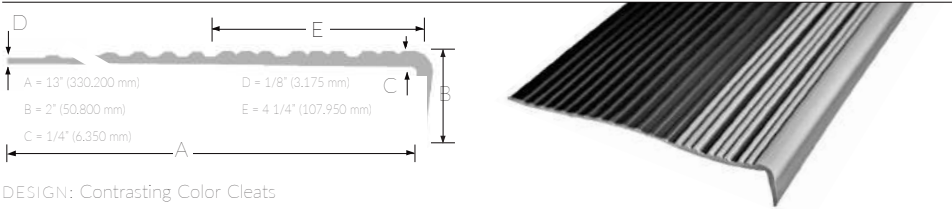

Available in 5 predetermined color combinations with cleats for maximum slip-resistance as shown. Also any color combination of the 20 Color System tread colors can be special ordered, minimum quantities apply.




#### VINYL AND RUBBER SAFETY VI TREAD

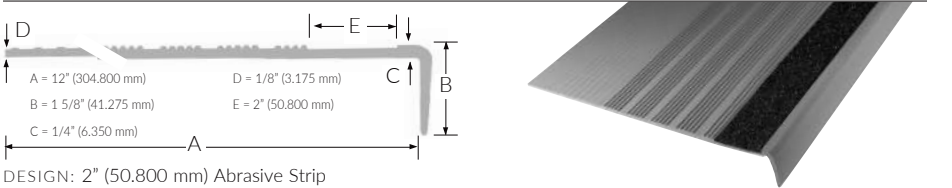


Visually Impaired Safety Treads meet California Disabled Access Regulation, Title 24, Section 3306 for the visually impaired when used with contrasting strip color.

Available in any of the 20 Color System colors and the 9 Abrasive Strip Insert colors below.



Tape may be ordered separately for onsite installations.


#### VINYL AND RUBBER HEAVY DUTY TREAD

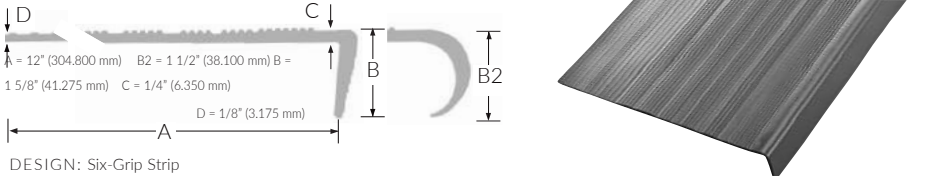

#### VINYL STANDARD TRAFFIC TREAD



#### VINYL LIGHT TRAFFIC TREAD

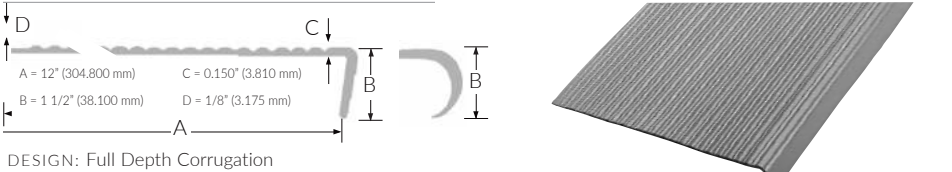




STAIR NOSINGS | VISUAL SAFETY

The 2 inch slip-resistant polyurethane insert is for slip-resistance and contrasts with the background nosing to increase vision at steps for visually impaired requirements. All Stair Nosings meet the California Disabled Access Regulations Title 24, Section 3306[r], striping for the visually impaired when used in contrasting color to step material.

AVAILABLE IN ALL 36 CORECOLORS

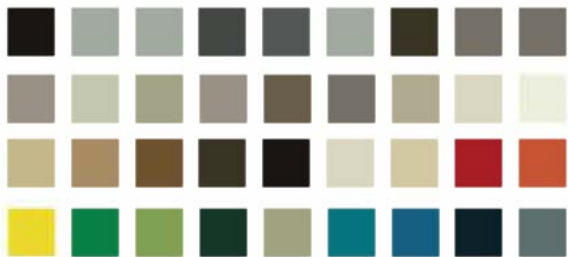

Tread Collection Stair Nosings are the industry standard for design, function, and color. All are available in rubber, and come in the complete Core Color palette for easy color coordination.

SPECIFICATIONS FOR LINEAR SERIES STAIR TREADS & STAIR NOSINGS



Stair Nosings meet the requirements of sections 4.5.2 (change in level) and 4.5.3 (carpet-edge trim compliance) of the Americans with Disabilities Act (ADA).

ACCESSORIES	.085" Stringers .085" Risers (Cove)	10" x 50' 7" x 50'
COMPOSITION	Thermoplastic Rubber and Thermoplastic Vinyl	
APPLICATION	All stair treads and nosings manufactured for heavy traffic areas	
APPLICABLE STANDARDS	Class 1 Fire Rated (ASTM E-648) ADA and California Title 24, Section 3306 (r) (Slip Resistance) and (r)2 (nosing projection)	

SAFETY NOSINGS

PART NUMBER	PROFILE	DESCRIPTION
557 Visual Safety Nosing		Contrasting insert for Visually Impaired. Accepts 1/4" with lip.  Packing: 6-12' secs., 72 LIN. FT. per carton  Available in any interchangeable combination of the 20 Colors.
577 Visual Safety Nosing for 1/8" Material		Contrasting color insert for Visually Impaired.  Packing: 10-12' secs., 120 LIN. FT. per carton  Available in any interchangeable combination of the 20 Colors.
578 Visual Abrasive Safety Nosing for 1/8" Material		Visual Abrasive Safety Nosing for 1/8" Material.  Packing: 10-12' secs., 120 LIN. FT. per carton  Available in any of the 20 Colors and the 9 Abrasive Strip Insert colors on facing page.
STAIR NOSINGS		
PART NUMBER	PROFILE	DESCRIPTION
510 Top-Set Nosing (Square Nose)		Covers leading edge of step. May be used over vinyl and sheet goods.  Packing: 20-12' secs., 240 LIN. FT. per carton
511 Top-Set Nosing (Round Nose)		Covers leading edge of step. May be used over vinyl and sheet goods.  Packing: 20-12' secs., 240 LIN. FT. per carton
560 Double Butt Carpet Stair Nosing		For square nose step. Double butt edge; smooth surface; accommodates step and riser. For 1/4" carpet installations.  Packing: 10-12' secs., 120 LIN. FT. per carton
565 Double Undercut Carpet Stair Nosing		For 1/4" and 5/16" carpet. Accommodates step and riser; with ribbed surface.  Packing: 10-12' secs., 120 LIN. FT. per carton
566 Double Undercut Carpet Nosing - 3/8"		Accommodates 3/8" Multi-Purpose resilient flooring or carpet on both step and riser.  Packing: 4-12' secs., 48 LIN. FT. per carton
570 Superior Carpet Stair Nosing		Friction-Grip nosing for use when only step is covered. Undercut for 1/4" and 5/16" carpet.  Packing: 10-12' secs., 120 LIN. FT. per carton
575 Overlap Stair Nosing		Nosing with deep grooves and overlap lip. Accepts material to 1/8" with lip, to 3/16" without lip.  Packing: 10-12' secs., 120 LIN. FT. per carton
580 Commercial Step Nosing		Square step nosing for 1/8" material. Ribbed surface.  Packing: 10-12' secs., 120 LIN. FT. per carton
585 Top-Set Nosing for 1/4", 1/8" or .080" Material		Ribbed surface nosing can be cut along pregrooved channels to adjoin 1/4", 1/8" or .080" resilient flooring materials.  Packing: 10-12' secs., 120 LIN. FT. per carton
ESN Stair Nosing		Deep reach nosing for top step or landing area installations. Butts to .100" or 1/8" flooring.  Packing: 10-12' secs., 120 LIN. FT. per carton

# TRANSITIONAL REDUCER

## SUBFLOOR TRANSITION SYSTEM

Transitioning subfloors is now quick and easy. No curing. No delays. Leveling is done in no time. Subfloor Transitional Reducers solve the problem of slight differences in elevation between flooring surfaces. Traditional methods of using patching compounds is eliminated, so transitions are done quickly and more accurately.

## TRANSITIONAL REDUCER TECHNICAL DATA

### ADVANTAGES INCLUDE

- Scoring marks placed at common thicknesses
- No waiting time for leveling compounds to cure
- Ribbed back helps promote better adhesion
- Designed to be installed over concrete, wood, and steel subfloors
- Made from an environmentally friendly recycled thermoplastic compound

### SPECIFICATIONS

Fire Resistance: ASTM E-648 Critical Radiant Heat Flux - Class I


Slip Resistance: ASTM D-2047 - Exceeds Federal Standards and ADA requirements

Hardness: ASTM 2240 - not less than 85 Shore A

Static Load Limit: ASTM F-970 - 0.0% (.000") @ 250 lbs. after 24 hrs.


Abrasion Resistance: ASTM D-3389 - less than 1 mg/cycle

190




Reducer to 1/4" to 0". Can be cut at scoreline to reducer height as indicated.  
Packing: 10-4' sections, 40 LIN. FT. per carton

191



Reducer to 3/8" to 0". Can be cut at scoreline to reducer height as indicated.  
Packing: 5-4' sections, 20 LIN. FT. per carton

192



Reducer to 1/2" to 0". Can be cut at scoreline to reducer height as indicated. Packing:  
5-4' sections, 20 LIN. FT. per carton

# TRANSITIONAL MOULDINGS

Transitional Mouldings are coded as follows for easy recognition of all possible applications of each product:

- CARPET
- RESILIENT
- CERAMIC
- WOOD



**TRANSITIONAL MOULDINGS** help to transition carpet, resilient tiles, resilient sheet vinyl, ceramic, laminate and wood to 0".

PART NUMBER	APP	PROFILE	DESCRIPTION	PACKAGING
140 Carpet Reducer - 1/4"			Reduces 1/4" flooring to 0". 1 1/4" transition.	15-20' secs. Per carton (300 LIN. FT.)
144 Butt-to Reducer - 3/8"			Edge reducer for 3/8" material in a 2 1/2" width for wheeled traffic.	100' Per carton in 2-50' coils
146 Universal Reducer - 3/8"	   		Reduces 3/8" materials to 0". 1 5/8" transition.	10-12' secs. Per carton (120 LIN. FT.)
147 Overlap Reducer - 3/8"	 		Reducer overlaps 3/8" Multi-Purpose resilient flooring or carpet.	12' secs. Per carton (120 LIN. FT.)

# TRANSITIONAL MOULDINGS

AVAILABLE IN ALL 36 CORE COLORS



Mouldings are coded as follows for easy recognition of all possible applications of each product:



23% RAW MATERIALS WITHIN 500 MI OF PLANT

## ADA


Mouldings meet the requirements of sections 4.5.2 (change in level) and 4.5.3 (carpet-edge trim compliance) of the Americans with Disabilities Act (ADA).



633 - Tile Reducer - 1/8"



700 - Imperial Reducer - 5/16"

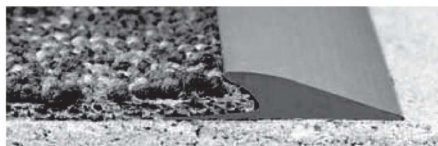

800 - Imperial Reducer - 1/4"

TRANSITIONAL MOULDINGS help to transition carpet, resilient tiles, resilient sheet vinyl, ceramic, laminate and wood to 0".

PART NUMBER	APP	PROFILE	DESCRIPTION	PACKAGING
148 Material to Substrate Reducer			Reduces 3/8" materials to substrate surface in a 4" wide span.	10-12' secs. Per carton (120 LIN. FT.)
149 Material to Substrate Reducer			Reduces 1/2" materials to substrate surface in a 4" wide span.	10-12' secs. Per carton (120 LIN. FT.)
160 Universal Reducer			Edge reducer for 1/2" materials. 2" transition.	10-12' secs. Per carton (120 LIN. FT.)
165 Carpet to Resilient Reducer - 1/4"			Reduces 1/4" to 1/8" resilient in a 2" wide span for wheeled traffic.	10-12' secs. Per carton (120 LIN. FT.)
170 Carpet Transitional Reducer			9/32" reducer with 2 1/2" transition.	10-12' secs. Per carton (120 LIN. FT.)
174 Wedge Shape Reducer - 1/8"			Adjoins 1/8". Reduces to 0" over a 4" run. Can be used as reducer or as subfloor transition in place of trowable underlayment.	100' per carton in 100' coil
175 Carpet Ramp			1/4" reducer with 4" transition. For heavy rolling traffic.	10-12' secs. Per carton (120 LIN. FT.)
176 Laminate to Substrate Reducer			Reduces 5/8" laminate to substrate surface in a 4" wide span.	6-12' secs. Per carton (72 LIN. FT.)
189 Wide Reducer			Butts to reduce 3/4" materials to substrate surface in a 12" wide span.	20-4' secs. Per carton (80 LIN. FT.)
200 Royal Commercial Reducer			Transition reducer. 5/16" undercut for use with tackless or double-stick installations.	10-12' secs. Per carton (120 LIN. FT.)
630 Tile Reducer - 1/16"			Butts to reduce gauge of resilient to 0". 1" x 36" x 1/16".	50-3' secs. Also available in 2-100' coils.
632 Tile Reducer - 3/32"			Butts to reduce gauge of resilient to 0". 1" x 36" x 3/32".	50-3' secs. Also available in 2-100' coils.
633 Tile Reducer - 1/8"			Butts to reduce gauge of resilient to 0". 1" x 36" x 1/8".	50-3' secs. Also available in 2-100' coils.
700 Imperial Reducer - 5/16"			1 11/32" transition reducer. For glue-down carpet; 5/16" undercut. Can be trimmed to butt to tile.	20-12' secs. Per carton (240 LIN. FT.)
705 Super Imperial Reducer			1 15/16" heavy duty transition reducer. For glue-down carpet; 5/16" undercut. Can be trimmed to butt to tile.	10-12' secs. Per carton (120 LIN. FT.)
Underslung Reducer 733 (Self-Stick) 735 (Dry Back)			Binder-Bar edging for 1/16" to 1/8" resilient floors. With self-stick or dry back.	22-3' secs. self-stick per carton (66 LIN. FT.) 2-35' coils dry back per carton (70 LIN. FT.)
800 Imperial Reducer - 1/4"			1 1/4" transition reducer. For glue-down carpet; 1/4" undercut. Can be trimmed to butt to resilient tile.	20-12' secs. Per carton (240 LIN. FT.)
900 Imperial Reducer - 3/16"			1 1/16" transition reducer. For glue-down carpet; 3/16" undercut. Can be trimmed to butt to resilient tile.	20-12' secs. Per carton (240 LIN. FT.)
901 Superior Imperial Reducer - 3/16"			2 3/16" transition reducer. For glue-down carpet; 3/16" undercut.	1-50' coils (50 LIN. FT.)

## MAT EDGE MOULDINGS




















































Flexible vinyl for protecting edges of floor mats. Minimums may apply.

420, 425 Mat Edging			Flexible vinyl for protecting edges of floor mats. 420: 3/16" butt edge. 1 5/8" transition. 425: 3/8" butt edge. 1 5/8" transition.	2-50' coils Per carton (100 LIN. FT.)
---------------------	--	--	---	---------------------------------------

# TRANSITION MOULDINGS







## JOINING MOULDINGS

Joining mouldings help to join two different types and/or thicknesses of flooring to each other.


PART NUMBER	APP	PROFILE	DESCRIPTION	PACKAGING
150 Tile-Carpet Joiner			One-piece moulding. Joins 1/4" carpet to 1/8" tile.	25-12' secs. Per carton (300 LIN. FT.)
152 Carpet to Resilient Transition	 		Transitions 1/4" or 5/16" glue-down carpet to 1/16" to 1/8" resilient.	20-12' secs. Per carton (240 LIN. FT.)
153 Cerco Bar-3/8"	  		One-piece moulding for joining 5/16" carpet to 3/8" ceramic materials.	10-12' secs. Per carton (120 LIN. FT.)
166 Sheet Vinyl Transition	   		One piece molding used to join 1/16" thick tile or sheet flooring material.	20-6' secs. Per carton (120 LIN. FT.)
360 Cerco T	  		Snap-in T moulding. Joins 1/2" material. Uses 970, 980, or 990 track only.	20-12' secs. Per carton (240 LIN. FT.)
365 Cerco Edge T	   		Joins 1/2" material to lesser-gauge material. Uses 970, 980, or 990 track only.	20-12' secs. Per carton (240 LIN. FT.)
370 End Cap T	  		Butts up against edge of 1/2" material to lesser-gauge material. Uses 970, 980, or 990 track only.	20-12' secs. Per carton (240 LIN. FT.)
710 Carpet to Resilient Transition	 		Transitions 5/16" glue-down carpet to 1/8" resilient.	10-12' secs. Per carton (120 LIN. FT.)
930 Snap-Down T	 		Snap-in T moulding. Joins 1/4" or 5/16" material on each side. Uses 970, 980, or 990 track only.	20-12' secs. Per carton (240 LIN. FT.)
935 Super 2" T	 		Snap-in T moulding. Joins 1/4" or 5/16" material on each side. Uses 970, 980, and 990 track only.	20-12' secs. Per carton (240 LIN. FT.)
940 Standard Edge T	 		Joins 1/4" to lesser-gauge. 1 1/8" wide; 1/4" leg. Uses 970, 980, or 990 track only.	20-12' secs. Per carton (240 LIN. FT.)
970 Single Flange Vinyl Track	 		For 1/4" and 1/2" leg T portions. Use with 360, 365, 930, 935 & 940 T's.	20-12' secs. Per carton (240 LIN. FT.)
975 Vinyl Track Extender	 		Adds height up to 5/8" on Snap-in T moulding for ceramic, wood, and laminates. Use with 970 track for 360, 365, 930, 935, and 940 T's.	20-12' secs. Per carton (240 LIN. FT.)
980 Pinless Metal Track	 		Designed to install T mouldings 360, 365, 930, 935 and 940. Aluminum.	48-12' secs. Per carton (576 LIN. FT.)
990 Metal Track with pins	 		Designed to install T mouldings 360, 365, 930, 935 and 940. Aluminum.	48-12' secs. Per carton (576 LIN. FT.)

## COVE SUPPORTS

Cove supports support sheet vinyl when coved up the wall.

070 Cove Stick (Flexible) (401 White only)			Quarter-round. Supports sheet goods for coving. Forms 1" radius at 90° installation.	5-20' coils Per carton (100 LIN. FT.)
075 Cove Stick (Semi-Rigid) (400 Natural only)			Quarter round. Supports sheet goods for coving. Forms 1" radius at 90° installation.	100-5' secs. Per carton (500 LIN. FT.)
725 Tristick (400 Natural only)			Coving support for sheet vinyl. Replaces wood cove. Forms 1" radius at 90° installation.	100-5' secs. Per carton (500 LIN. FT.)

## AVAILABLE IN ALL 36 CORE COLORS

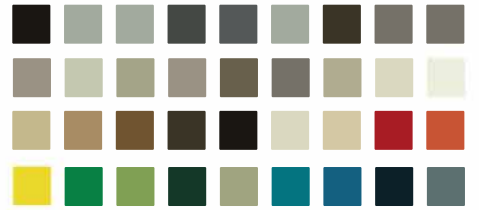


Mouldings are coded as follows for easy recognition of all possible applications of each product:


-  CARPET
-  RESILIENT
-  CERAMIC
-  WOOD




Mouldings meet the requirements of sections 4.5.2 (change in level) and 4.5.3 (carpet-edge trim compliance) of the Americans with Disabilities Act (ADA).

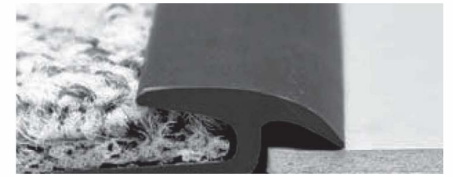


150 - Tile-Carpet Joiner - 1/8"

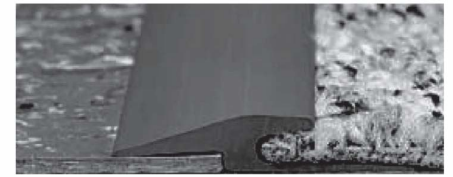

152 - Carpet to Resilient Transition - 1/8"

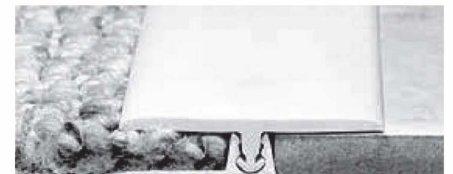








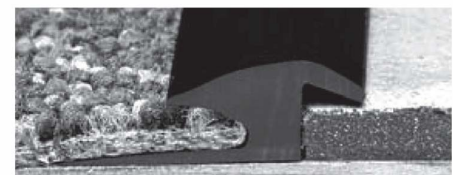935 - Super 2" T - 1/4"







153 - Cerco Bar - 3/8"

**EDGE FINISHING MOULDINGS** help finish exposed edges of covered sheet vinyl, covered carpet, ceramic tile and wood paneling. Shapes 225, 230 and 400 can also be used as walk-off transitions.

PART NUMBER	APP	PROFILE	DESCRIPTION	PACKAGING
022 Carpet Cove Cap			Semi-rigid capping. For 1/4" and 5/16" covered carpet: one-man installation.	20-12' secs. Per carton (240 LIN. FT.)
040 Round Cap - 1/8"			Cap for covered sheet goods. 1/8" gauge; round top.	50-12' secs. Per carton (600 LIN. FT.)
225 Flex Cove Cap			Cap for 3/16" covered/glue-down carpet.	20-12' secs. Per carton (240 LIN. FT.)
230 Mono Edge			Flexible capping. For 1/4" covered/glue-down carpet or grass: one-man installation.	20-12' secs. Per carton (240 LIN. FT.)
390 Square Cap - 1/8"			Cap for 1/8" covered sheet vinyl.	50-12' secs. Per carton (600 LIN. FT.)
400 Custom Edge			Bevel-edge reducer. For 5/16" carpet; deep undercut.	25-12' secs. Per carton (300 LIN. FT.)
430 Tricap - 9/32"			Cap for covered carpet, paneling, and ceramics. 9/32" inside dimension.	50-12' secs. Per carton (600 LIN. FT.)
450 Square Cap - 1/4"			Square cap for covered carpets and wood panels.	40-12' secs. Per carton (480 LIN. FT.)

## FLEXIBLE CORNER GUARDS

PART NUMBER	PROFILE	DESCRIPTION	PACKAGING
691 Flexible Corner Guard		90° angular shaped profile with 2 1/2" return legs. Legs taper from 7/32" at nose to 3/16" at tip.	6-54" secs. (27 LIN. FT.) Per carton or 6-108" secs. (27 LIN. FT.) Per carton*
693 Flexible Corner Guard		90° angular shaped profile with 3/4" return legs. Legs taper from 7/32" at nose to 3/16" at tip.	20-54" secs. (90 LIN. FT.) Per carton* or 20-108" secs. (180 LIN. FT.) Per carton*
695 Flexible Corner Guard		90° angular shaped profile with 1 1/2" return legs. 1/8" leg thickness.	20-54" secs. (90 LIN. FT.) Per carton* or 20-108" secs. (180 LIN. FT.) Per carton*
696 Profiles Corner Guard		Designed to complement Profiles Wall Base.	20-8' secs. (160 LIN. FT.) Per carton * special order

## TRANSITION MOULDING TECHNICAL DATA

Composition: Thermoplastic Vinyl


Installation: Install with high quality solvent-based contact adhesive for compatibility

Application: All mouldings manufactured for heavy traffic areas Applicable

Standards: Class 1 Fire Rated (ASTM E-648), ADA, OSHA

## THRESHOLDS


### 684 Full Saddle - 1/2"



5 1/2" wide door threshold adjoins 1/4" Multi-Purpose flooring or Carpet or Ceramic.

36" length - 18' per carton

### 686 Full Saddle - 3/4"



6" wide door threshold adjoins 1/4" Multi-Purpose flooring or Carpet.


36" length - 12' per carton

## TUB MOULDINGS

### 060 Tub Moulding - Self-Stick

Mirror-Finish® cove for bathtub, counter, and shelves; 1 1/2" height.


24-5' secs. Per carton (120 LIN. FT.) 401 White and 403 Almond only



### 605 Tub Moulding - Self-Stick

Mirror-Finish® cove for bathtub, counter, and shelves; 1" height.

24-5' secs. Per carton (120 LIN. FT.) 401 White and 403 Almond only




## MISC. MOULDINGS

### 642 Feature Strip - 3/32"


Accent strip for custom inlay floors; 3/32" gauge. 1" x 36" x 3/32".

50-3' secs. Per carton (150 LIN. FT.)



### 643 Feature Strip - 1/8"


Same specifications as 642 Feature Strip, but 1/8" thick.



### 655 Utility Moulding - 3/4"

Finish moulding for inside any right angle.

25-5' secs. Per carton (125 LIN. FT.) 401 White and 403 Almond only



## ADA

Mouldings meet the requirements of sections 4.5.2 (change in level) and 4.5.3 (carpet-edge trim compliance) of the Americans with Disabilities Act (ADA). All of our flooring products conform with ADA Accessibility Guideline Requirements that floors be stable, firm, and slip-resistant.