
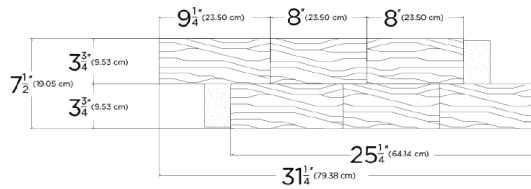


3 D W O O D W A L L P A N E L S

OFFSET

K O N C E P T C O L L E C T I O N

W O O D

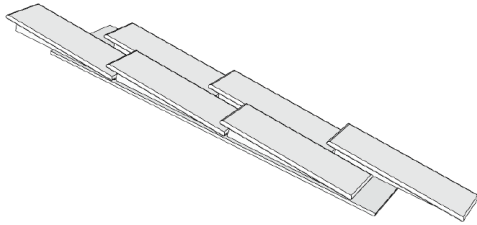

S P E C I F I C A T I O N S & C O L O R S

- ◆ **SPECIES (s)**  
White Oak or Walnut  
(see color chart)
- ◆ **CUT PATTERN**  
Straight
- ◆ **THICKNESS**  
\*1-3/16 inches (30.16 mm)
- ◆ **TILES/BOX**  
16
- ◆ **COLORS**  
13 Available
- ◆ **GRADE**  
Aged Character with Knots
- ◆ **COVERAGE/TILE**  
\*1.32 sf. (0.123 m<sup>2</sup>)
- ◆ **WEIGHT/TILE**  
\*3.10 lbs. (1.41 kg) • Walnut  
\*3.38 lbs. (1.53 kg) • White Oak
- ◆ **INSTALL DIRECTION**  
Horizontal, Vertical or Diagonal
- ◆ **FIRE RESISTANT**  
Optional "A Rating" Fire Retardant
- ◆ **SURFACE TEXTURE (ST)**  
Smooth  
(see color chart)
- ◆ **COVERAGE/BOX**  
\*21.12 sf. (1.96 m<sup>2</sup>)
- ◆ **WEIGHT/BOX**  
\*53.45 lbs. (24.24 kg) • Walnut  
\*57.93 lbs. (26.28 kg) • White Oak
- ◆ **INSTALLATION**  
Construction Glue & Fine Needle Nails
- \* Weight, coverage and dimensions may vary depending on finish and the natural expansion and contraction of wood.



	EVERWHITE	BROKEN EARTH	WOODGRAIN	GREY THORN	SOUTHTREE	COLD WILLOW	BRIARPATCH	EBONY FOREST	BEIGEWOOD	UNDERBRUSH	PINCONE	CEDAR OAK	ASPEN RIDGE
<b>S</b>	WHITE OAK	WHITE OAK	WHITE OAK	WHITE OAK	WHITE OAK	WHITE OAK	WHITE OAK	WHITE OAK	WHITE OAK	WALNUT	WALNUT	WHITE OAK	WALNUT
<b>ST</b>	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	LIGHT WIRE-BRUSH	SMOOTH	SMOOTH	SMOOTH	SMOOTH



**Product Sample Disclaimer**  
Created to be a one-of-a-kind piece of nature's artistry, each and every Trinity Surfaces wood product carries distinct variations in finish, patina, texture, grain and overall character that create the unique diversity and natural elegance of our 3D Wood Wall Panels. It is virtually impossible to capture – in a small sample – the entire range of color variation and character that will be present in the wall covering you will receive. To better understand the unique look of a Trinity Surfaces finished wall covering in your space, we recommend consulting your sales representative for more details.

**Installation and Performance Disclaimer**  
Environmental conditions, such as exposure to light, and fluctuations in temperature and humidity, will greatly affect product performance from initial installation throughout its life. Refer to our website for installation guidelines or see your local sales representative for more information on proper steps and specific environmental conditions to successfully install, care for and ensure the lifelong performance of your 3D Wood Wall Panels.

For more information, please contact us at 1-866-774-3390 or visit [trinitysurfaces.com](http://trinitysurfaces.com).